


Codice articolo Product code:	2004221 – 2004223 – 2004225
Descrizione Description:	STOA PRECABLATA SU 2 LATI OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS

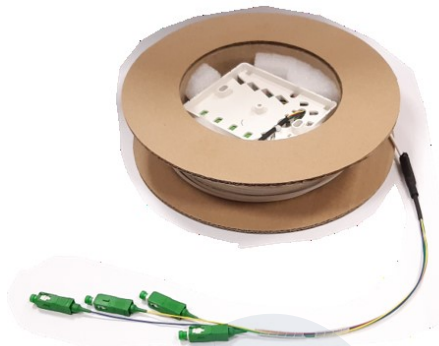

Descrizione

Scatola di terminazione ottica di appartamento (STOA) precablata da ambo i lati. Adatta all'utilizzo nelle infrastrutture ottiche multiservizio per la distribuzione dei servizi (connettività internet, antenna satellitare, digitale terrestre e altro) provenienti dal CSOE.
Disponibile nelle versioni già precablate con cavo ottico da 20, 40 e 60 mt.

Caratteristiche principali

Struttura	Scatola in materiale plastico dotata di 4 porte completa di 4 bussole SC/SC APC Simplex con shutter per la protezione dalla polvere, 1 vassoio portagiunti a 4 posizioni, cavo ottico da interno di lunghezza predefinita a 4 fibre monomodali tipo G.657.A2 già connesso da ambo i lati con connettori SC/APC
Posizioni	4 alloggiamenti per bussole SC-SC Simplex o LC-LC Duplex
Installazione	A parete o a incasso
Dimensioni	L100xP80xH29 mm
Colore	Bianco
Cavo ottico	4 fibre 9/125 tipo G.657.A Rivestimento primario fibre da 250 µm Riempitivo in filati aramidici Diametro: 2,5 mm Peso: 30 Kg/Km Tiro massimo: 120N Raggio curvatura dinamico: 20xOD Raggio curvatura statico: 15xOD Temperatura operativa: -20/+60° C Guaina LSZH Conforme Euroclasse Eca

Versioni disponibili

Precablata con 20 mt di cavo	Cod. 2004221
Precablata con 40 mt di cavo	Cod. 2004223
Precablata con 60 mt di cavo	Cod. 2004225

Confezionamento

Confezione	Scatola in cartone – 1pz
Peso	1Kg

Description

Home optical telecommunication wall outlet pre-wired on both ends. Suitable to be used in multifiber building systems for the distribution of connectivity services (antenna/satellite/cable TV signals or internet) provided by the Building Entry Point.
Available pre-wired with optical cables 20-40-60 mt. long.

General features

Structure	Plastic 4-port box fitted with 4 SC/APC Simplex adapters with dust protection shutter, 1 splice tray 4 positions, indoor optical cable of preset length with 4 fibre SM type G.657.A2, pre-terminated with SC/APC connectors on both ends
Ports	4 blank ports suitable for the mounting of SC-SC Simplex or LC-LC Duplex adapters
Installation	On wall or recessed
Dimensions	L100xD80xH29 mm
Color	White
Optical cable	4 fibres 9/125 type G.657.A2 250 µm primary coating Water-blocking aramid yarn Diameter: 2.5 mm Weight: 30Kg/Km Tensile strength: 120N Min. dynamic bending radius: 20xOD Min. static bending radius: 15xOD Operating temperature: -20/+60° C Jacket LSZH Euroclass Eca compliant

Available versions


Pre-wired with 20 mt	Cod. 2004221
Pre-wired with 40 mt	Cod. 2004223
Pre-wired with 60 mt	Cod. 2004225

Packaging

Package	Cardboard box – 1pc
Weight	1 Kg

Codice articolo Product code:	2004221 – 2004223 – 2004225
Descrizione Description:	STOA PRECABLATA SU 2 LATI OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS

DISEGNO TECNICO/TECHNICAL DRAWINGS

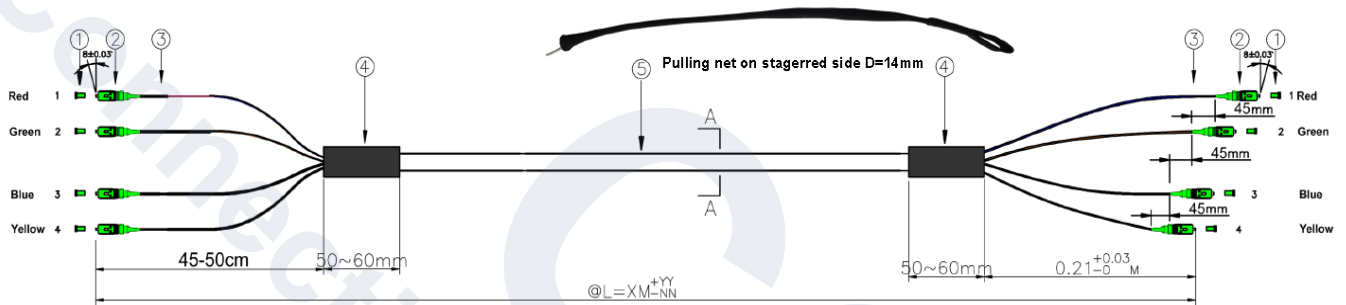

1	DUST CAP	Color: Green
2	CONNECTOR	Type: SC/APC Simplex - Boot color: green - Body color :green
3	0.9 mm BRANCH CABLE	Branch cables: diameter 0.9 mm - Colors: red, green, blue, yellow
4	HEAT SHRINK TUBE	Diameter: 3 mm - Color: black
5	OPTICAL BABLE	4 core 9/125 G.657.A2 - LSZH jacket - Diameter 2.5 mm - Color: white

