



Code	2008496 - 2008497 - 2008498
Description	Drop cables Tight Buffered, 6-12-24 FO 9/125 G.657.A2, LSZH jacket, Cca

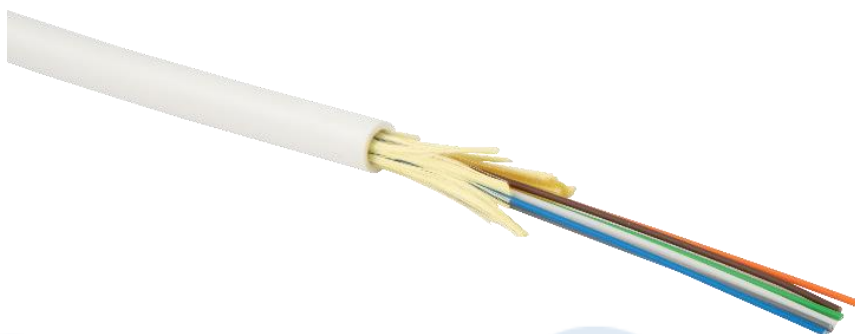

Drop cables

Tight Buffered optical cables for indoor use with 6,12,and 24 singlemode G.657.A2 fibers, aramid yarns filling, outer sheath in LSZH (Low Smoke Zero Halogen), Euroclass Cca s1a,d0,a1. The optical fibers have a tight buffer of 900 µm (for 6-12 FO cables) or 600 µm (for 24Fo cables). These cables are ideal for vertical backbones distribution cables in POLAN-type optical networks and for the implementation of FTTH systems.

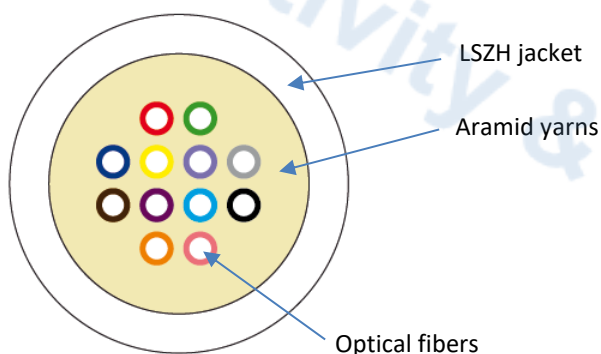

Constructive characteristics

Construction	6 - 12 - 24 Tight Buffered fibers
Buffer	900 µm for 6-12 FO cables 600 µm for 24 FO cables
Optical fiber type	Singlemode 9/125 G.657.A2 bend insensitive
Filler	Aramid yarns
Outer jacket material	LSZH (Low Smoke Zero Halogen)
Jacket color	White
Cable outer diameter	6,8 ± 0,5 mm

Mechanical and environmental properties

Use	Indoor
Bend. radius (long term)	10 x outer diameter
Max. pull strength	600 N (60 kg max.)
Crush	1000 N/dm
Installation temperature	from -15°C to +50°C
Operating temperature	from -20°C to +70°C

Code	2008496 - 2008497 - 2008498
Description	Drop cables Tight Buffered, 6-12-24 FO 9/125 G.657.A2, LSZH jacket, Cca

Reference standards

Cables and optical fibers

EN 60793

EN 60794-1

ITU-T G.657.A2

Structured cabling

EN 50173-1

ISO/IEC 11801

ANSI/TIA 568.3-D

Fire behavior

CRP regulation

EN 50575

Euroclass Cca s1a,d0,a1

Fire reaction

EN 60332-1-2; EN 50399

Smoke density

EN 61034-1/2

Acid gas emission

EN 60754-1/2

Optical cables suitable for single or bundle installations in areas with major risk in case of fire (where the use of cables in Euroclass Cca s1b,d1,a1 or higher is required).

Packaging


Drum

1000 or 2000 mt $\pm$ 5%

Reference codes

Cores number	6	12	24
Code	2008496	2008497	2008198

Recommendations of use

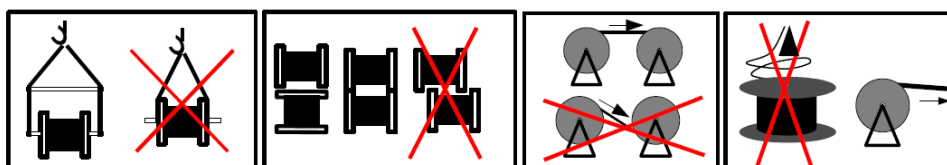

Code	2008496 - 2008497 - 2008498
Description	Drop cables Tight Buffered, 6-12-24 FO 9/125 G.657.A2, LSZH jacket, Cca

SINGLE-MODE OPTICAL FIBER SPECIFICATIONS

<i>Optical fiber type</i>	<i>9/125 OS2 (ITU G.657.A2)</i>
Cladding diameter	125 ± 0,7 µm
Cladding Non-Circularity	≤ 0,7%
Concentricity error core/cladding	≤ 0,5 µm
Concentricity error cladding/coating	≤ 12 µm
Attenuation λ=1310 nm	≤ 0,34 dB/Km
Attenuation λ=1550 nm	≤ 0,20 dB/Km
Attenuation λ=1625 nm	≤ 0,24 dB/Km
Group Index @ 1310 nm	1,467
Group Index @ 1550 nm	1,467
Cable cut-off wavelength	λ _{cc} ≤ 1260 nm
Zero-dispersion wavelength λ ₀	1300-1324 nm
Slope at λ ₀	S ₀ ≤ 0,092 ps/(nm ² · Km)
Mode field diameter @ 1310 nm	9,2 ± 0,4 µm
Mode field diameter @ 1550 nm	9,8 ± 0,5 µm
PMD	≤ 0,04 ps/√Km
Macrobending 10 turns, 15 mm, @ 1,550 nm	≤ 0,03 dB
Macrobending 10 turns, 15 mm, @ 1,625 nm	≤ 0,1 dB
Macrobending 1 turn, 10 mm, @ 1,550 nm	≤ 0,1 dB
Macrobending 1 turn, 10 mm, @ 1,625 nm	≤ 0,2 dB
Macrobending 1 turn, 7.5 mm, @ 1,550 nm	≤ 0,5 dB

Optical fibers are fully compliant with IEC/EN 60793-1, IEC/EN 60793-2, EN 50173 and ISO/IEC 11801