



## technical data sheet

Description :

### **DATACENTER PRO SERIES CABINETS** **Front glass door and blind side and rear panels**

Datacenters PRO series cabinets are designed for the containment of all kinds of server computers and 19" active components that are available in the networking market. The rack can house all the 19" accessories and it's suitable for the installation of specific accessories with greater depth to contain and support non-modular devices. They are available with a width of 600 or 800 mm and a depth of 1000 or 1200 mm, provided with front glass door and blind side and rear panels. It is possible to customize the cabinets according to the needs of the customer.

CODE		DESCRIPTION	DIMENSIONS (mm)						WEIGHT	STATIC LOAD
			OVERALL			USEFUL				
W	D	H	W.us	D.us	H.us	Kg	Kg			
RAL 7035	RAL 9005									
2009028	2009028N	Cabinet 19" 600x1000x27U	600	1000	1340	486.5	926	1220	90	1000
2009038	2009038N	Cabinet 19" 800x1000x27U	800	1000	1340	686.5	926	1220	105	1000
2009015	2009015N	Cabinet 19" 600x1000x42U	600	1000	2007	486.5	926	1887	120	1000
2009031	2009031N	Cabinet 19" 800x1000x42U	800	1000	2007	686.5	926	1887	135	1000
2009059	2009059N	Cabinet 19" 800x1200x42U	800	1200	2007	686.5	1126	1887	150	1000
2009043	2009043N	Cabinet 19" 600x1000x47U	600	1000	2229	486.5	926	2019	130	1000
2009034	2009034N	Cabinet 19" 800x1000x47U	800	1000	2229	686.5	926	2109	145	1000



### **MAIN FEATURES**

- Steel sheet structure
- Painting: standard color Grey RAL 7035 or Black RAL 9005 (upon request)
- Front tempered safety glass door with quick release system, opening 270°
- Side and rear blind panels with ¼ turn device quick removal system
- Push-button handle with key
- Ventilation slits for exhaust air and holes for the installation on the roof for ventilation units with 2, 3 or 4 fans
- Roof and basement have removable trapdoors for cable inlet
- IP20 degree of protection according to EN 60259
- Nr. 4 vertical uprights in steel according to IEC 60297-1, thickness 2 mm, adjustable in depth, with unit number and highly conductive metallic varnish finishing
- Earthing kit
- Loading weight with levelling feet is 1000 Kg
- Nr. 4 levelling feet
- IEC 60297, EN 62208 compliant

QUBIX S.p.A. Networking solutions – Via Canada, 22/A – 35127 Padova – Italy  
Tel. +39 049 7801994 – Fax +39 049 775667 – <http://www.qubix.it>

Rev. 01-19

Qubix S.p.A. si riserva di apportare modifiche e migliorie in qualsiasi momento senza preavviso  
Qubix S.p.A. reserves the right to make changes and improvements at any time without notice



*technical data sheet*

Description :

**DATACENTER PRO SERIES CABINETS**  
**Front glass door and blind side and rear panels**

*TECHNICAL DRAWINGS*



**QUBIX S.p.A. Networking solutions – Via Canada, 22/A – 35127 Padova – Italy**  
**Tel. +39 049 7801994 – Fax +39 049 775667 – <http://www.qubix.it>**

Rev. 01-19

Qubix S.p.A. si riserva di apportare modifiche e migliorie in qualsiasi momento senza preavviso  
Qubix S.p.A. reserves the right to make changes and improvements at any time without notice




Description :


**DATACENTER PRO SERIES CABINETS**  
**Front glass door and blind side and rear panels**

*TECHNICAL DRAWINGS*


Front view

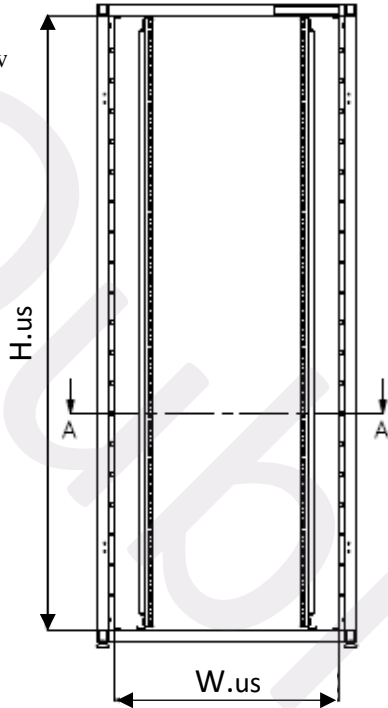

Side view

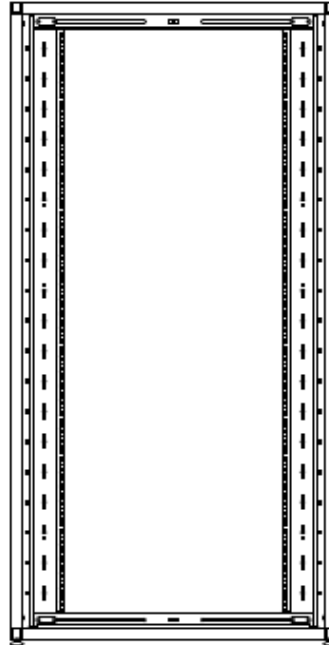


Top view  
Sez. A-A



Cable inlet facilities on the base

View of  
the roof



Cable inlet facilities on the roof


Ventilation slot allow passage of warm air  
and installation of ventilation units



Description :

**DATACENTER PRO SERIES CABINETS**  
**Front glass door and blind side and rear panels**

**TECHNICAL DRAWINGS**

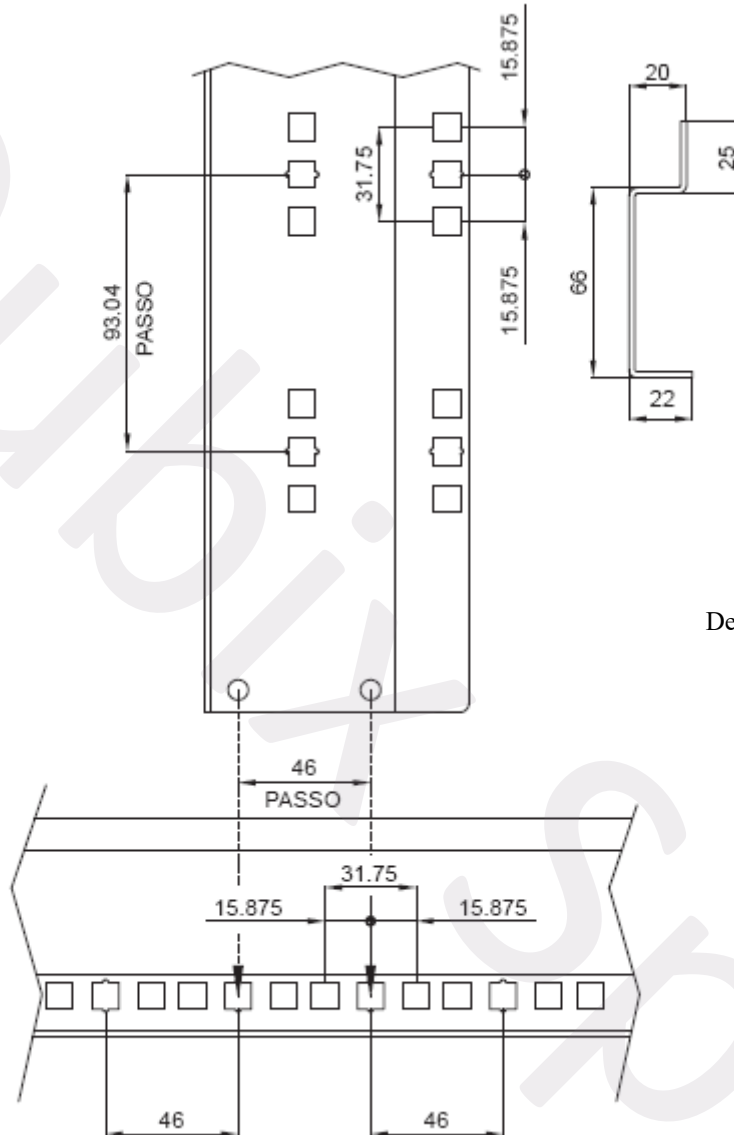

Detail of 19" uprights

Notes:

Positioning pitch of 19" uprights:

46 mm with intermediate adjustments of 15,875 mm