

Description:

DATACENTER PRO SERIES CABINETS

Front and rear grilled doors and blind side panels

Datacenters PRO series cabinets are designed for the containment of all kinds of server computers and 19" active components that are available in the networking market. The rack can house all the 19" accessories and it's suitable for the installation of specific accessories with greater depth to contain and support non-modular devices. They are available with a width of 600 or 800 mm and a depth of 1000 mm, provided with front and rear grilled doors and blind side panels. It is possible to customize the cabinets according to the needs of the customer.

| CODE | | DESCRIPTION | DIMENSIONS (mm) | | | | | | WEIGHT | STATIC LOAD |
|----------|----------|--------------------------|-----------------|------|------|--------|------|------|--------|----------------|
| | | | OVERALL | | | USEFUL | | | | 107.5 |
| RAL 7035 | RAL 9005 | | W | D | Н | W.us | D.us | H.us | Kg | Kg |
| 2009055 | 2009055N | Cabinet 19" 600x1000x42U | 600 | 1000 | 2007 | 486.5 | 926 | 1887 | 120 | 1000 |
| 2009057 | 2009057N | Cabinet 19" 800x1000x42U | 800 | 1000 | 2007 | 686.5 | 926 | 1887 | 130 | 1000 |
| 2009056 | 2009056N | Cabinet 19" 600x1000x47U | 600 | 1000 | 2229 | 486.5 | 926 | 2019 | 135 | 1000 |
| 2009058 | 2009058N | Cabinet 19" 800x1000x47U | 800 | 1000 | 2229 | 686.5 | 926 | 2109 | 145 | 1000 |



MAIN FEATURES

- Steel sheet structure
- Painting: standard color Grey RAL 7035 or Black RAL 9005 (upon request)
- Front and rear 75% grilled doors with quick release system, opening 270°
- Side blind panels with ¼ turn device quick removal system
- Push-button handle with key
- Ventilation slits for exhaust air and holes for the installation on the roof for ventilation units with 2, 3 or 4 fans
- Roof and basement have removable trapdoors for cable inlet
- IP20 degree of protection according to EN 60259
- Nr. 4 vertical uprights in steel according to IEC 60297-1, thickness 2 mm, adjustable in depth, with unit number and highly conductive metallic varnish finishing
- Earthing kit
- Loading weight with levelling feet is 1000 Kg
- Nr. 4 levelling feet
- IEC 60297, EN 62208 compliant



Description:

DATACENTER PRO SERIES CABINETS
Front and rear grilled doors and blind side panels

TECHNICAL DRAWINGS







Description:

DATACENTER PRO SERIES CABINETS

Front and rear grilled doors and blind side panels


TECHNICAL DRAWINGS

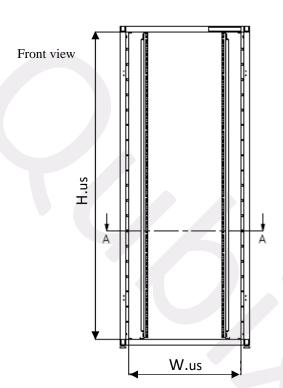

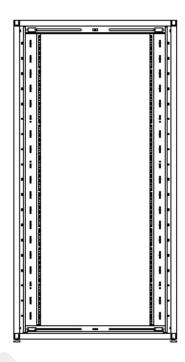


Side view

Top view Sez. A-A



Cable inlet facilities on the base

View of the roof



Cable inlet facilities on the roof

Ventilation slot allow passage of worm air and installation of ventilation units




Description:

DATACENTER PRO SERIES CABINETS

Front and rear grilled doors and blind side panels

TECHNICAL DRAWINGS

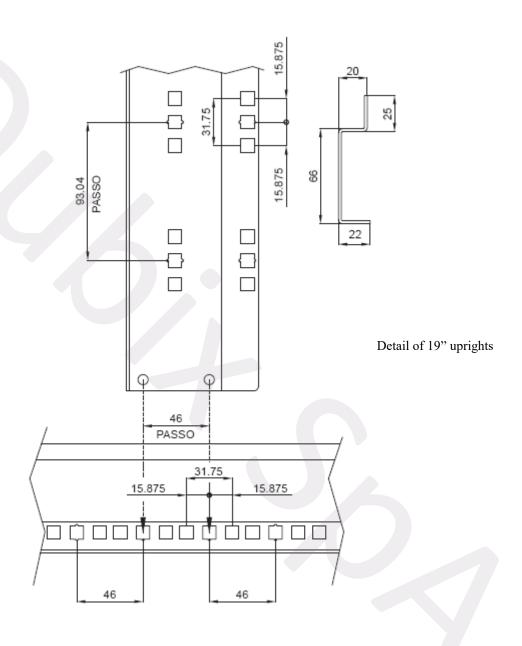

Notes:

Positioning pitch of 19" uprights:

46 mm with intermediate adjustments of 15,875 mm