


<b>Codice articolo</b> <b>Product code:</b>	<b>2004221 – 2004223 – 2004225</b>
<b>Descrizione</b> <b>Description:</b>	<b>STOA PRECABLATA SU 2 LATI</b> <b>OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS</b>

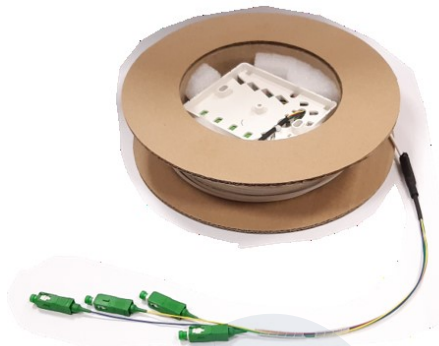

#### **Descrizione**

Scatola di terminazione ottica di appartamento (STOA) precablata da ambo i lati. Adatta all'utilizzo nelle infrastrutture ottiche multiservizio per la distribuzione dei servizi (connettività internet, antenna satellitare, digitale terrestre e altro) provenienti dal CSOE.  
Disponibile nelle versioni già precablate con cavo ottico da 20, 40 e 60 mt.

#### **Caratteristiche principali**

<b>Struttura</b>	Scatola in materiale plastico dotata di 4 porte completa di 4 bussole SC/SC APC Simplex con shutter per la protezione dalla polvere, 1 vassoio portagiunti a 4 posizioni, cavo ottico da interno di lunghezza predefinita a 4 fibre monomodali tipo G.657.A2 già connesso da ambo i lati con connettori SC/APC
<b>Posizioni</b>	4 alloggiamenti per bussole SC-SC Simplex o LC-LC Duplex
<b>Installazione</b>	A parete o a incasso
<b>Dimensioni</b>	L100xP80xH29 mm
<b>Colore</b>	Bianco
<b>Cavo ottico</b>	4 fibre 9/125 tipo G.657.A Rivestimento primario fibre da 250 µm Riempitivo in filati aramidici Diametro: 2,5 mm Peso: 30 Kg/Km Tiro massimo: 120N Raggio curvatura dinamico: 20xOD Raggio curvatura statico: 15xOD Temperatura operativa: -20/+60° C Guaina LSZH Conforme Euroclasse Eca

#### **Versioni disponibili**

Precablata con 20 mt di cavo	Cod. 2004221
Precablata con 40 mt di cavo	Cod. 2004223
Precablata con 60 mt di cavo	Cod. 2004225

#### **Confezionamento**

<b>Confezione</b>	Scatola in cartone – 1pz
<b>Peso</b>	1Kg

#### **Description**

Home optical telecommunication wall outlet pre-wired on both ends. Suitable to be used in multifiber building systems for the distribution of connectivity services (antenna/satellite/cable TV signals or internet) provided by the Building Entry Point.  
Available pre-wired with optical cables 20-40-60 mt. long.

#### **General features**

<b>Structure</b>	Plastic 4-port box fitted with 4 SC/APC Simplex adapters with dust protection shutter, 1 splice tray 4 positions, indoor optical cable of preset length with 4 fibre SM type G.657.A2, pre-terminated with SC/APC connectors on both ends
<b>Ports</b>	4 blank ports suitable for the mounting of SC-SC Simplex or LC-LC Duplex adapters
<b>Installation</b>	On wall or recessed
<b>Dimensions</b>	L100xD80xH29 mm
<b>Color</b>	White
<b>Optical cable</b>	4 fibres 9/125 type G.657.A2 250 µm primary coating Water-blocking aramid yarn Diameter: 2.5 mm Weight: 30Kg/Km Tensile strength: 120N Min. dynamic bending radius: 20xOD Min. static bending radius: 15xOD Operating temperature: -20/+60° C Jacket LSZH Euroclass Eca compliant

#### **Available versions**


Pre-wired with 20 mt	Cod. 2004221
Pre-wired with 40 mt	Cod. 2004223
Pre-wired with 60 mt	Cod. 2004225

#### **Packaging**

<b>Package</b>	Cardboard box – 1pc
<b>Weight</b>	1 Kg

<b>Codice articolo</b> <b>Product code:</b>	<b>2004221 – 2004223 – 2004225</b>
<b>Descrizione</b> <b>Description:</b>	<b>STOA PRECABLATA SU 2 LATI</b> <b>OPTICAL TELECOMMUNICATION WALL OUTLET - PREWIRED ON BOTH ENDS</b>

**DISEGNO TECNICO/TECHNICAL DRAWINGS**

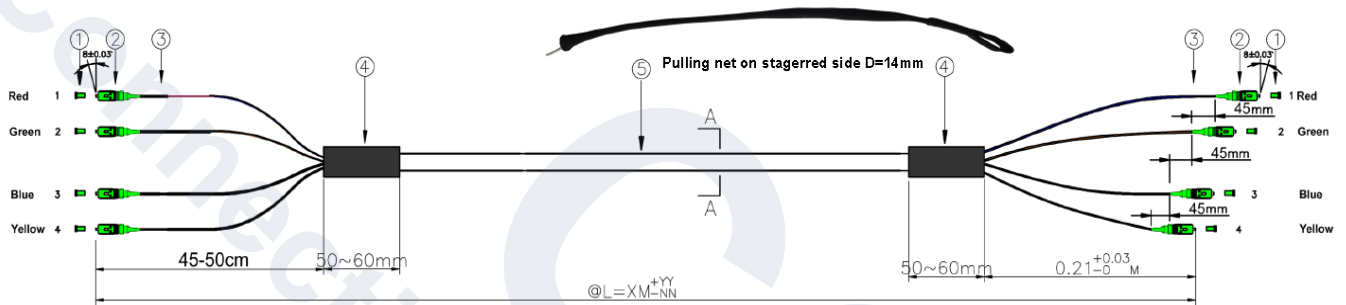

1	DUST CAP	Color: Green
2	CONNECTOR	Type: SC/APC Simplex - Boot color: green - Body color :green
3	0.9 mm BRANCH CABLE	Branch cables: diameter 0.9 mm - Colors: red, green, blue, yellow
4	HEAT SHRINK TUBE	Diameter: 3 mm - Color: black
5	OPTICAL BABLE	4 core 9/125 G.657.A2 - LSZH jacket - Diameter 2.5 mm - Color: white

